
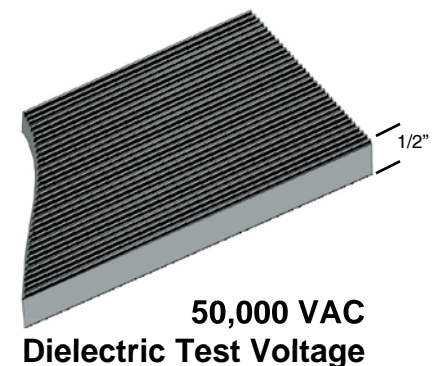
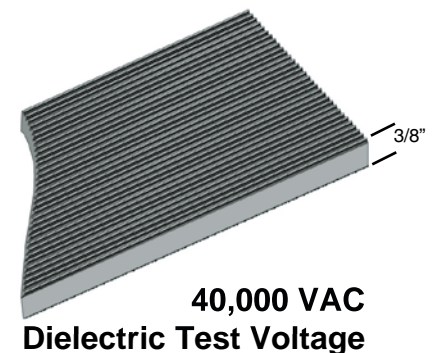
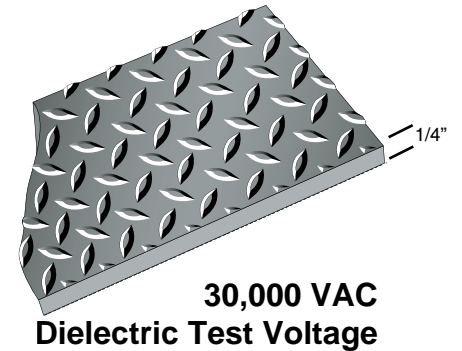
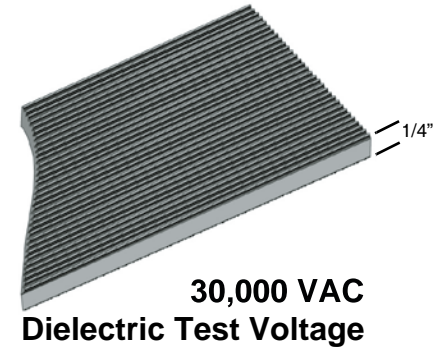


ASTM SWITCHBOARD Rubber Insulating Mats

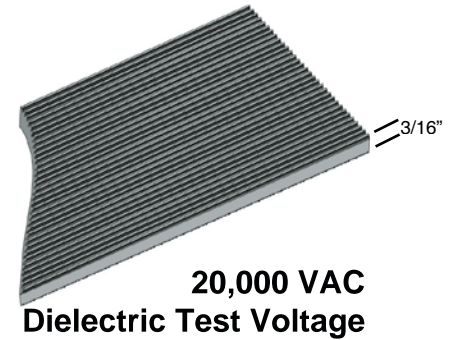

CORRUGATED SWITCHBOARD MATTING

- A specially compounded non-conductive corrugated matting designed to help prevent electric shock around high voltage electrical equipment, such as fuse boxes, and control panels.
- Now meets all optional requirements for Ozone Resistance, Flame Resistance, and Oil Resistance.
- Tested to ASTM D178/ANSI J6.7. Certification engraved on back.

CLASS 1 - 3/16" Thick Switchboard - Corrugated

- DIELECTRIC TEST VOLTAGE 20,000 VAC
- PROOF TESTED OVER ENTIRE SURFACE AT 10,000 VAC
- RECOMMENDED MAXIMUM USE VOLTAGE 7,500 VAC

Stock #	Size	Weight/Ln.Ft.
SB336	3' x 75'	3.9 lbs.

Color: Black. Sold in full rolls only.

CLASS 2 - 1/4" Thick Switchboard - Corrugated & Diamond Pattern

- DIELECTRIC TEST VOLTAGE 30,000 VAC
- PROOF TESTED OVER ENTIRE SURFACE AT 20,000 VAC
- RECOMMENDED MAXIMUM USE VOLTAGE 17,000 VAC

Stock #	Size	Weight/Ln.Ft.
SB424	2' x 75'	3.5 lbs.
SB436	3' x 75'	5.2 lbs.
SB448	4' x 75'	6.8 lbs.

Color: Black.

CLASS 3 - 3/8" Thick Switchboard - Corrugated

- DIELECTRIC TEST VOLTAGE 40,000 VAC
- PROOF TESTED OVER ENTIRE SURFACE AT 30,000 VAC
- RECOMMENDED MAXIMUM USE VOLTAGE 26,500 VAC

Stock #	Size	Weight/Ln.Ft.
SB536	3' x 75'	7.7 lbs.

Color: Black. Sold in full rolls only.

CLASS 4 - 1/2" Thick Switchboard - Corrugated

- DIELECTRIC TEST VOLTAGE 50,000 VAC
- PROOF TESTED OVER ENTIRE SURFACE AT 40,000 VAC
- RECOMMENDED MAXIMUM USE VOLTAGE 36,000 VAC

Stock #	Size	Weight/Ln.Ft.
SB636	3' x 30'	10.7 lbs.

Color: Black. Sold in full rolls only.