
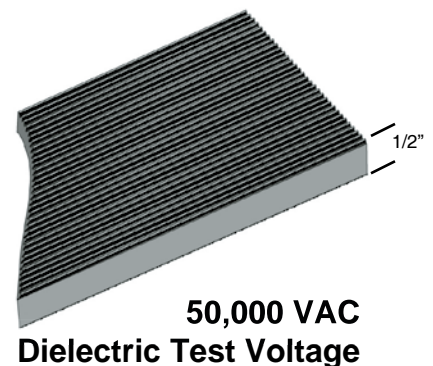
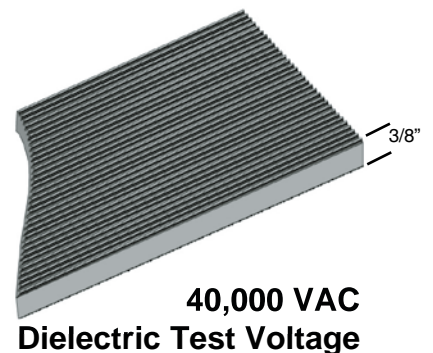
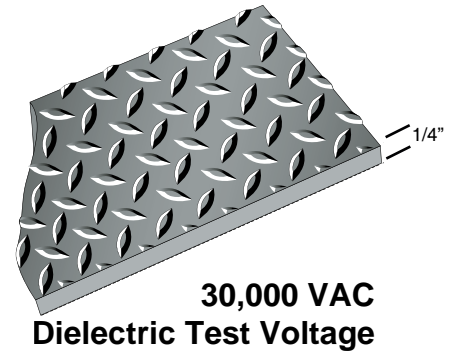
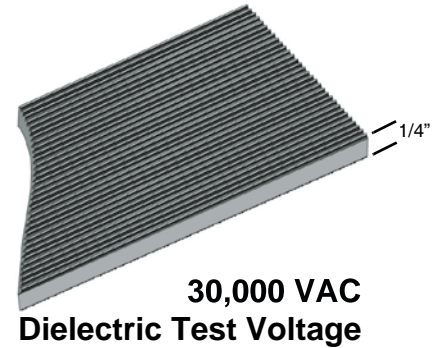
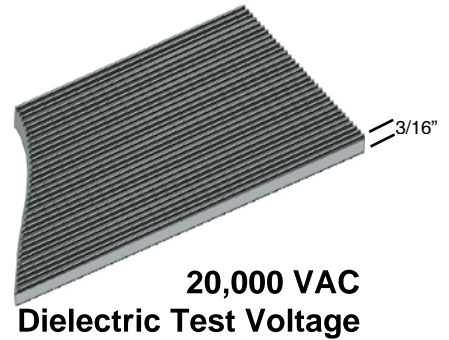


ASTM SWITCHBOARD Rubber Insulating Mats

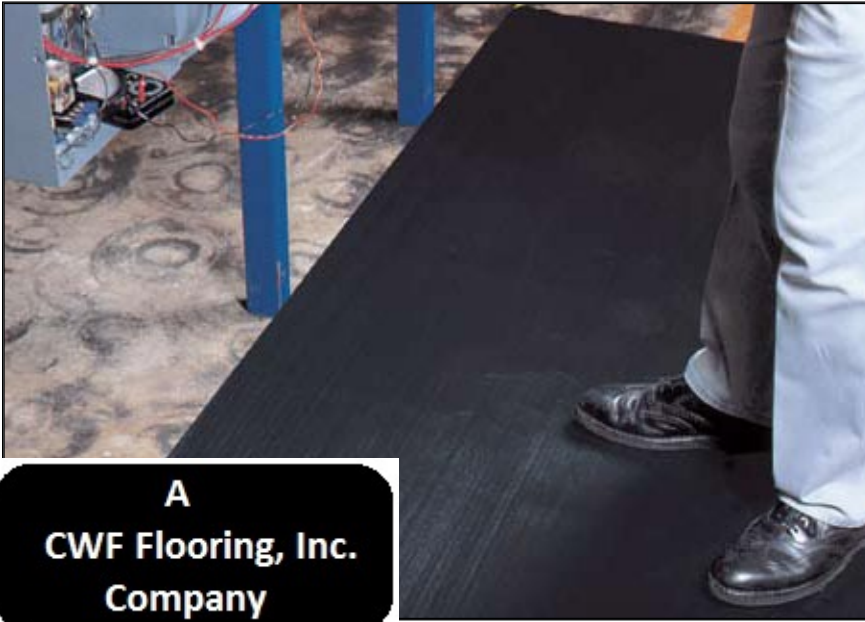

A
CWF Flooring, Inc.
Company

CORRUGATED SWITCHBOARD MATTING

- A specially compounded non-conductive corrugated matting designed to help prevent electric shock around high voltage electrical equipment, such as fuse boxes, and control panels. High voltage mat with Certifications
- Now meets all optional requirements for Ozone Resistance, Flame Resistance, and Oil Resistance.
- Tested to ASTM D178/ANSI J6.7. Certification engraved on back.

CLASS 1 - 3/16" Thick Switchboard - Corrugated

• DIELECTRIC TEST HIGH VOLTAGE	20,000 VAC
• PROOF TESTED OVER ENTIRE SURFACE AT	10,000 VAC
• RECOMMENDED MAXIMUM USE VOLTAGE	7,500 VAC
Stock #	Size
SB336	3' x 75'
	Weight/Ln.Ft.
	3.9 lbs.

Color: Black. Sold in full rolls only.

CLASS 2 - 1/4" Thick Switchboard - Corrugated & Diamond Pattern

• DIELECTRIC TEST VOLTAGE	30,000 VAC
• PROOF TESTED OVER ENTIRE SURFACE AT	20,000 VAC
• RECOMMENDED MAXIMUM USE VOLTAGE	17,000 VAC
Stock #	Size
SB424	2' x 75'
SB436	3' x 75'
SB448	4' x 75'
	Weight/Ln.Ft.
	3.5 lbs.
	5.2 lbs.
	6.8 lbs.

Color: Black.

CLASS 3 - 3/8" Thick Switchboard - Corrugated

• DIELECTRIC TEST VOLTAGE	40,000 VAC
• PROOF TESTED OVER ENTIRE SURFACE AT	30,000 VAC
• RECOMMENDED MAXIMUM USE VOLTAGE	26,500 VAC
Stock #	Size
SB536	3' x 75'
	Weight/Ln.Ft.
	7.7 lbs.

Color: Black. Sold in full rolls only.

CLASS 4 - 1/2" Thick Switchboard - Corrugated

• DIELECTRIC TEST VOLTAGE	50,000 VAC
• PROOF TESTED OVER ENTIRE SURFACE AT	40,000 VAC
• RECOMMENDED MAXIMUM USE VOLTAGE	36,000 VAC
Stock #	Size
SB636	3' x 30'
	Weight/Ln.Ft.
	10.7 lbs.

Color: Black. Sold in full rolls only.