


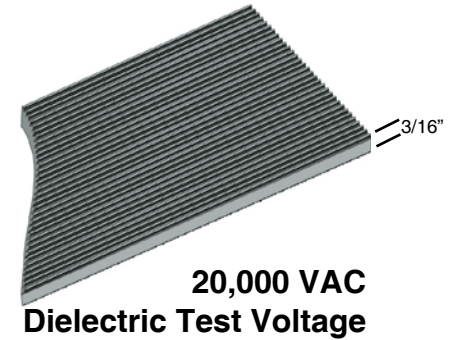


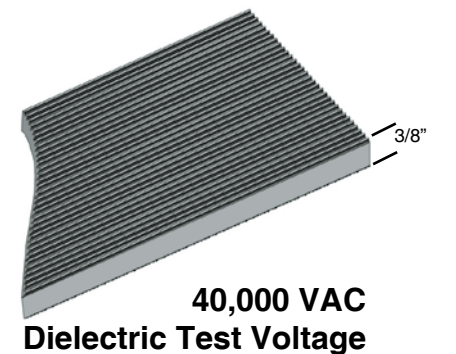


# ASTM SWITCHBOARD Rubber Insulating Mats

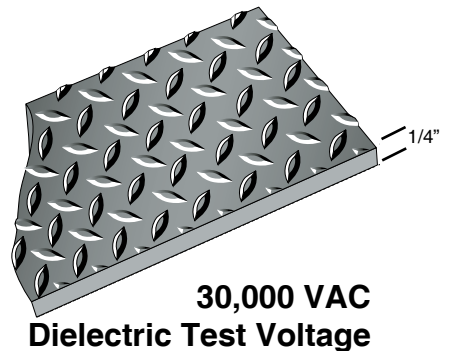

Tel :  
1-661-273-8700

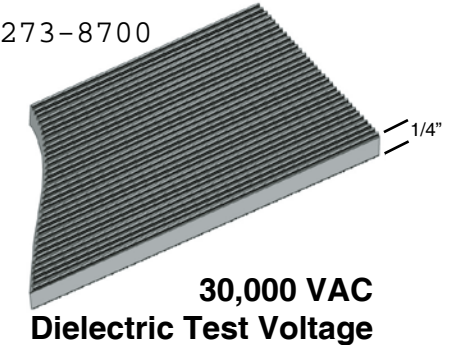

With Optional  
Beveled Edge

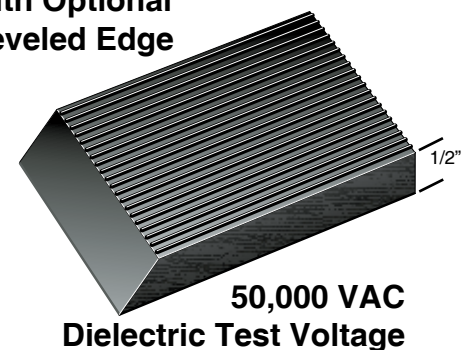

## CORRUGATED SWITCHBOARD MATTING

- A specially compounded non-conductive corrugated matting designed to help prevent electric shock around high voltage electrical equipment, such as fuse boxes, and control panels. Call: 1-661-273-8700
- Now meets all optional requirements for Ozone Resistance, Flame Resistance, and Oil Resistance.
- Tested to ASTM D178/ANSI J6.7. Certification engraved on back.

CLASS 1 - 3/16" Thick Switchboard - Corrugated		
• DIELECTRIC TEST VOLTAGE		20,000 VAC
• PROOF TESTED OVER ENTIRE SURFACE AT		10,000 VAC
• RECOMMENDED MAXIMUM USE VOLTAGE		7,500 VAC
Stock #	Size	Weight/Ln.Ft.
SB336	3' x 75'	3.9 lbs.
Color: Black. Sold in cut lengths and full rolls.		
CLASS 2 - 1/4" Thick Switchboard - Corrugated & Diamond Pattern		
• DIELECTRIC TEST VOLTAGE		30,000 VAC
• PROOF TESTED OVER ENTIRE SURFACE AT		20,000 VAC
• RECOMMENDED MAXIMUM USE VOLTAGE		17,000 VAC
Stock #	Size	Weight/Ln.Ft.
SB424	2' x 75'	3.5 lbs.
SB436	3' x 75'	5.2 lbs.
SB448	4' x 75'	6.8 lbs.
Color: Black. Sold in cut lengths and full rolls.		
CLASS 3 - 3/8" Thick Switchboard - Corrugated		
• DIELECTRIC TEST VOLTAGE		40,000 VAC
• PROOF TESTED OVER ENTIRE SURFACE AT		30,000 VAC
• RECOMMENDED MAXIMUM USE VOLTAGE		26,500 VAC
Stock #	Size	Weight/Ln.Ft.
SB536	3' x 75'	7.7 lbs.
Color: Black. Sold in cut length and full rolls.		
CLASS 4 - 1/2" Thick Switchboard - Corrugated		
• DIELECTRIC TEST VOLTAGE		50,000 VAC
• PROOF TESTED OVER ENTIRE SURFACE AT		40,000 VAC
• RECOMMENDED MAXIMUM USE VOLTAGE		36,000 VAC
Stock #	Size	Weight/Ln.Ft.
SB636	3' x 30'	10.7 lbs.
Color: Black. Sold in cut lengths and full rolls. Optional Bevel.		